



HYDRO WEST

Hydro West B.V.

De Factorij 12

1689 AL Zwaag

+31(0)229-263441

info@hydrowest.nl



www.hydrowest.nl

VALVOLA DI MASSIMA PRESSIONE A CARTUCCIA 35

TIPO / TYPE

VMPC

SCHEMA IDRAULICO
HYDRAULIC DIAGRAM

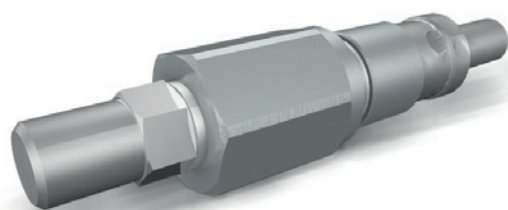

35 CARTRIDGE RELIEF VALVE

IMPIEGO:

Valvola utilizzata per limitare la pressione di un circuito idraulico ad un determinato valore di taratura. Al raggiungimento di tale valore la valvola si apre e scarica la pressione in modo che questa non salga oltre il valore di taratura.

MATERIALI E CARATTERISTICHE:

Corpo: acciaio zincato

Componenti interni: acciaio temprato termicamente e rettificato

Guarnizioni: BUNA N standard

Tenuta: a cono guidato. Trafilamento trascurabile.

USE AND OPERATION:

The relief valve provides overload protection in a fast and accurate way: when it reaches pressure setting, the valve open allowing pressure relief in order not to exceed this setting.

MATERIALS AND FEATURES:

Body: zinc-plated steel.

Internal parts: hardened and ground steel

Seals: BUNA N standard


Poppet type: minor leakage

MONTAGGIO:

Inserire ed avvitare la cartuccia nell'apposita cavità.

APPLICATIONS:

Fit the valve in the cavity.

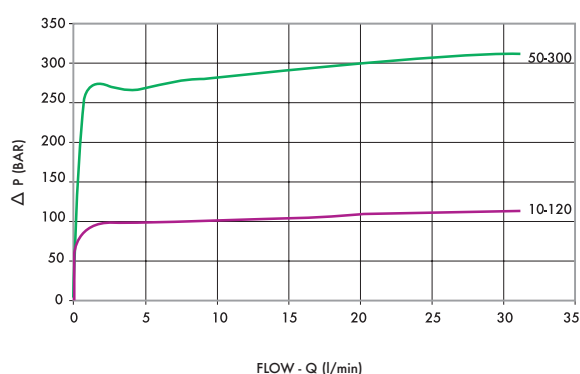



HYDRO WEST

Hydro West B.V.

De Factorij 12


1689 AL Zwaag

+31(0)229-263441

@ info@hydrowest.nl

www.hydrowest.nl

CODICE CODE	SIGLA TYPE	PORTATA MAX MAX FLOW Lt. / min	RANGE DI PRESSIONE PRESSURE RANGE Bar
VC0350/120	VMPC 35 10-120 BAR	35	10-120
VC0350/300	VMPC 35 50-300 BAR	35	50-300

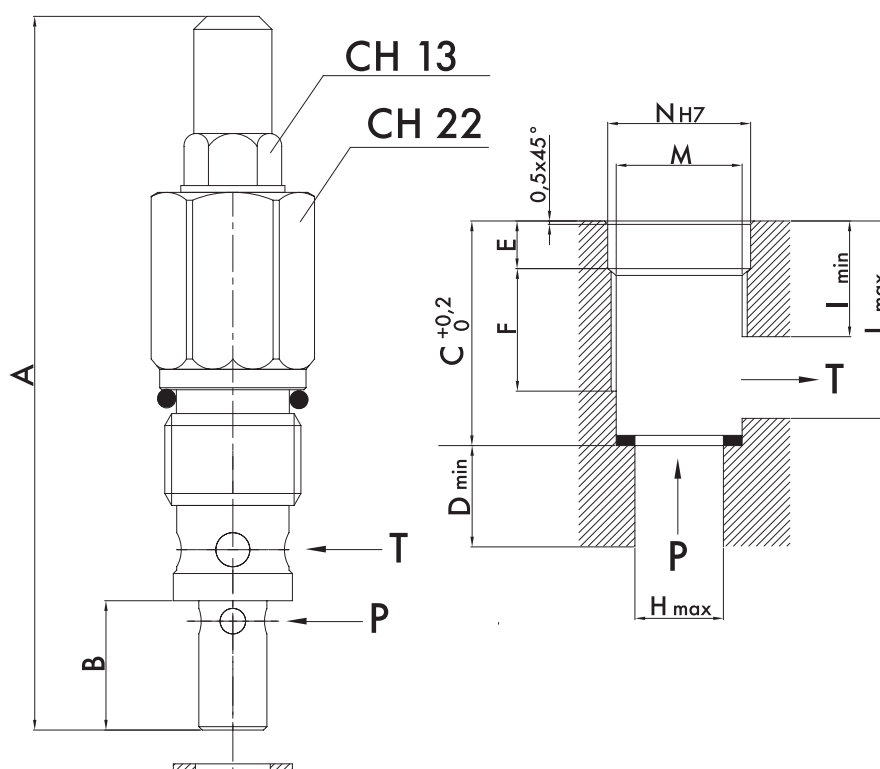

CODICE CODE	SIGLA TYPE	M MET	A mm	B mm	C mm	D mm	E mm	F mm	ØH mm	I mm	L mm	ØN mm	PESO/ WEIGHT kg
VC0350/120	VMPC 35 10-120 BAR	M20X1,5	104	19	34,5	21	7	16	13	18	29	21	0,155
VC0350/300	VMPC 35 50-300 BAR	M20X1,5	104	19	34,5	21	7	16	13	18	29	21	0,155

REGOLAZIONE - ADJUSTEMENT

CODICE/V • CODE/V Volantino • Handknob

CODICE/PP • CODE/PP Predisposizione alla piombatura • Arranged for sealing cap

CODICE/P • CODE/PP Piombatura • Sealing cap