


**Straight Reducer with 24° Taper / O-Ring
Type FI-SNV • Series L**

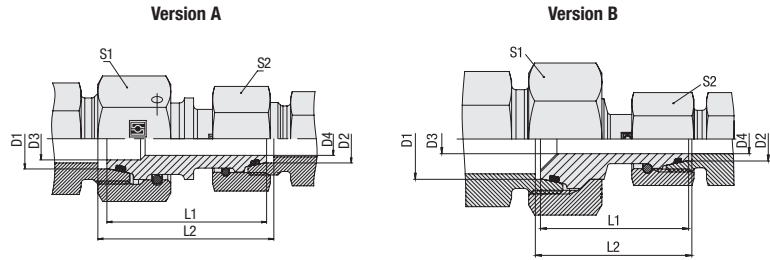


Ordering Codes

***FI-SNV*-10/*08*L*-B*-W3*-DKO**

- * Straight Reducer with 24° Taper / O-Ring (DKO) **FI-SNV**
- * Outside Tube Diameter D1 (in mm) **-10**
- * Outside Tube Diameter D2 (in mm) **08**
- * Series **L**
Light Series (page 120)
Heavy Series (page 121) **S**
- * Seal Material **-B**
NBR (Buna-N®)
FKM (Viton®) **-V**
EPDM **-E**
- * Material Code **-W3**
Steel, zinc/nickel-plated
- * Assembling / Kitting **-DKO**
Fitting body supplied with swivel nuts and O-rings

Spare Parts / Accessories



Series	Tube OD		PN (bar/psi)	Dimensions (mm/in)						Version	Weight (kg/lbs) Ca. per 100	Ordering Codes
	D1	D2		D3	D4	L1	L2	S1	S2			
L	8 L	6 L	500	3	3	34	36	17	14	A	4,72	FI-SNV-08/06L-B-W3-DKO
			7250	.12	.12	1.34	1.42	.67	.55		10.38	
	10 L	6 L	500	3	3	35	36,5	19	14	A	5,50	FI-SNV-10/06L-B-W3-DKO
			7250	.12	.12	1.38	1.44	.75	.55		12.10	
	10 L	8 L	500	5	5	35	36,5	19	17	A	5,21	FI-SNV-10/08L-B-W3-DKO
			7250	.20	.20	1.38	1.44	.75	.67		11.47	
	12 L	6 L	400	3	3	35	36,5	22	14	B	18,04	FI-SNV-12/06L-B-W3-DKO
			5800	.12	.12	1.38	1.44	.87	.55		39.68	
	12 L	8 L	400	5	5	36	37,5	22	17	B	6,22	FI-SNV-12/08L-B-W3-DKO
			5800	.20	.20	1.42	1.48	.87	.67		13.69	
	12 L	10 L	400	6,5	6,5	36,5	37,5	22	19	A	6,96	FI-SNV-12/10L-B-W3-DKO
			5800	.26	.26	1.44	1.48	.87	.75		15.31	
	15 L	8 L	400	5	5	36,5	38	27	17	B	1,96	FI-SNV-15/08L-B-W3-DKO
			5800	.20	.20	1.44	1.50	1.06	.67		4.30	
	15 L	10 L	400	6,5	6,5	37,5	38,5	27	19	B	4,40	FI-SNV-15/10L-B-W3-DKO
			5800	.26	.26	1.48	1.52	1.06	.75		9.69	
	15 L	12 L	400	8	8	44	45	27	22	A	11,69	FI-SNV-15/12L-B-W3-DKO
			5800	.31	.31	1.73	1.77	1.06	.87		25.73	
	18 L	10 L	400	6,5	6,5	38	39,5	32	19	B	12,68	FI-SNV-18/10L-B-W3-DKO
			5800	.26	.26	1.50	1.56	1.26	.75		27.89	
	18 L	12 L	400	8	8	38	39,5	32	22	B	13,51	FI-SNV-18/12L-B-W3-DKO
			5800	.31	.31	1.50	1.56	1.26	.87		29.72	
	18 L	15 L	400	11	11	45	46,5	32	27	A	16,60	FI-SNV-18/15L-B-W3-DKO
			5800	.43	.43	1.77	1.83	1.26	1.06		36.51	
22 L	12 L	250	8	8	40,5	42	36	22	B	17,52	FI-SNV-22/12L-B-W3-DKO	
		3625	.31	.31	1.59	1.65	1.42	.87		38.55		
22 L	15 L	250	11	11	42	43,5	36	27	B	19,83	FI-SNV-22/15L-B-W3-DKO	
		3625	.43	.43	1.65	1.71	1.42	1.06		43.63		
22 L	18 L	250	13	13	45	47	36	32	A	23,35	FI-SNV-22/18L-B-W3-DKO	
		3625	.51	.51	1.77	1.85	1.42	1.26		51.37		
28 L	15 L	250	11	11	43	44,5	41	27	B	23,86	FI-SNV-28/15L-B-W3-DKO	
		3625	.43	.43	1.69	1.75	1.61	1.06		52.50		
28 L	18 L	250	13	13	45	47	41	32	B	26,44	FI-SNV-28/18L-B-W3-DKO	
		3625	.51	.51	1.77	1.85	1.61	1.26		58.16		
28 L	22 L	250	17	17	46	48	41	36	B	28,93	FI-SNV-28/22L-B-W3-DKO	
		3625	.67	.67	1.81	1.89	1.61	1.42		63.65		
35 L	18 L	250	13	13	48	51,5	50	32	B	39,52	FI-SNV-35/18L-B-W3-DKO	
		3625	.51	.51	1.89	2.03	1.97	1.26		86.94		
35 L	22 L	250	17	17	49,5	53	50	36	B	41,34	FI-SNV-35/22L-B-W3-DKO	
		3625	.67	.67	1.95	2.09	1.97	1.42		90.95		
35 L	28 L	250	23	23	50	53,5	50	41	B	40,71	FI-SNV-35/28L-B-W3-DKO	
		3625	.91	.91	1.97	2.11	1.97	1.61		89.57		
42 L	22 L	250	17	17	49,5	53,5	60	36	B	56,50	FI-SNV-42/22L-B-W3-DKO	
		3625	.67	.67	1.95	2.11	2.36	1.42		124.30		
42 L	28 L	250	23	23	50	54	60	41	B	56,10	FI-SNV-42/28L-B-W3-DKO	
		3625	.91	.91	1.97	2.13	2.36	1.61		123.42		
42 L	35 L	250	28	28	53	58,5	60	50	B	60,70	FI-SNV-42/35L-B-W3-DKO	
		3625	1.10	1.10	2.09	2.30	2.36	1.97		133.54		

Standard seal material is NBR (Buna-N®).