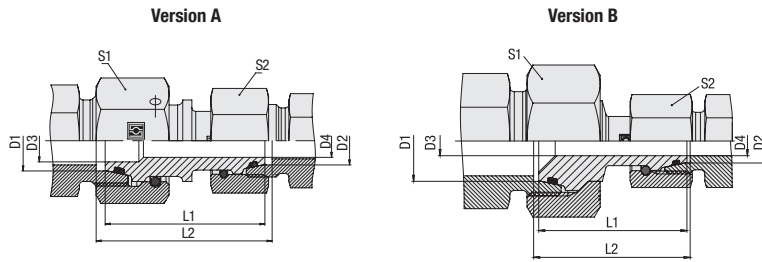


**Straight Reducer with 24° Taper / O-Ring  
Type FI-SNV ▪ Series S**


Series	Tube OD (mm/in)		PN (bar/psi)	Dimensions (mm/in)						Version	Weight (%)/lbs ca. per 100	Ordering Codes
	D1	D2		D3	D4	L1	L2	S1	S2			
S	6S	6L	500	3	3	35,5	37	17	14	A	3,70	FI-SNV-06S/06L-B-W3-DKO
			7250	.12	.12	1.40	1.46	.67	.55		8.14	
8 S	8 L	8 L	500	4	4	35,5	36,5	17	19	A	5,27	FI-SNV-08S/08L-B-W3-DKO
			7250	.16	.16	1.40	1.44	.67	.75		11.60	
10 S	6 S	6 S	800	3	3	40,5	42,5	22	17	A	6,30	FI-SNV-10/06S-B-W3-DKO
			11600	.12	.12	1.59	1.67	.87	.67		13.86	
10 S	8 S	8 S	800	4	4	39	41	22	19	A	7,60	FI-SNV-10/08S-B-W3-DKO
			11600	.16	.16	1.54	1.61	.87	.75		16.72	
12 S	6 S	6 S	630	3	3	39	43	24	17	B	7,79	FI-SNV-12/06S-B-W3-DKO
			9135	.12	.12	1.54	1.69	.94	.67		17.13	
12 S	8 S	8 S	630	4	4	44	46	24	19	A	9,42	FI-SNV-12/08S-B-W3-DKO
			9135	.16	.16	1.73	1.81	.94	.75		20.72	
12 S	10 S	10 S	630	6,5	6,5	41,5	43,5	24	22	A	9,73	FI-SNV-12/10S-B-W3-DKO
			9135	.26	.26	1.63	1.71	.94	.87		21.40	
16 S	10 S	10 S	630	6,5	6,5	43,5	46,5	30	22	B	14,11	FI-SNV-16/10S-B-W3-DKO
			9135	.26	.26	1.71	1.83	1.18	.87		31.03	
16 S	12 S	12 S	630	8	8	47,5	50,5	30	24	A	15,32	FI-SNV-16/12S-B-W3-DKO
			9135	.31	.31	1.87	1.99	1.18	.94		33.70	
20 S	12 S	12 S	400	8	8	48,5	52	36	24	B	21,90	FI-SNV-20/12S-B-W3-DKO
			5800	.31	.31	1.91	2.05	1.42	.94		48.18	
20 S	16 S	16 S	400	11	11	52,5	57	36	30	A	24,68	FI-SNV-20/16S-B-W3-DKO
			5800	.43	.43	2.07	2.24	1.42	1.18		54.30	
25 S	16 S	16 S	400	11	11	52	58	46	30	A	34,02	FI-SNV-25/16S-B-W3-DKO
			5800	.43	.43	2.05	2.28	1.81	1.18		74.84	
25 S	20 S	20 S	400	14	14	58	64,5	46	36	A	39,77	FI-SNV-25/20S-B-W3-DKO
			5800	.55	.55	2.28	2.54	1.81	1.42		87.49	
30 S	16 S	16 S	400	11	11	54	61,5	50	30	B	47,00	FI-SNV-30/16S-B-W3-DKO
			5800	.43	.43	2.13	2.42	1.97	1.18		103.40	
30 S	20 S	20 S	400	14	14	58,5	66,5	50	36	B	51,00	FI-SNV-30/20S-B-W3-DKO
			5800	.55	.55	2.30	2.62	1.97	1.42		112.20	
30 S	25 S	25 S	400	17	17	60	69,5	50	46	A	56,80	FI-SNV-30/25S-B-W3-DKO
			5800	.67	.67	2.36	2.74	1.97	1.81		124.96	
38 S	20 S	20 S	400	14	14	61	71,5	60	36	B	71,30	FI-SNV-38/20S-B-W3-DKO
			5800	.55	.55	2.40	2.81	2.36	1.42		156.86	
38 S	25 S	25 S	400	17	17	62,5	74,5	60	46	B	80,70	FI-SNV-38/25S-B-W3-DKO
			5800	.67	.67	2.46	2.93	2.36	1.81		177.54	
38 S	30 S	30 S	400	22	22	64,5	78	60	50	A	76,90	FI-SNV-38/30S-B-W3-DKO
			5800	.87	.87	2.54	3.07	2.36	1.97		169.18	

**Ordering Codes**
**\*FI-SNV\*-10/\*08\*L\*-B\*-W3\*-DKO**

- \* Straight Reducer with 24° Taper / O-Ring (DKO) FI-SNV
  - \* Outside Tube Diameter D1 (in mm) -10
  - \* Outside Tube Diameter D2 (in mm) 08
  - \* Series Light Series (page 120) L  
Heavy Series (page 121) S
  - \* Seal Material NBR (Buna-N®) -B  
FKM (Viton®) -V  
EPDM -E
  - \* Material Code Steel, zinc/nickel-plated -W3
  - \* Assembling / Kitting Fitting body supplied with swivel nuts and O-rings -DKO
- Please contact STAUFF for alternative materials and surface finishings.

**Spare Parts / Accessories**

 O-Ring  
Type **O-RING**

Standard seal material is NBR (Buna-N®).