


## Straight Reducer for Tube Ends with 24° Taper / O-Ring Type FI-RESDS • Series L

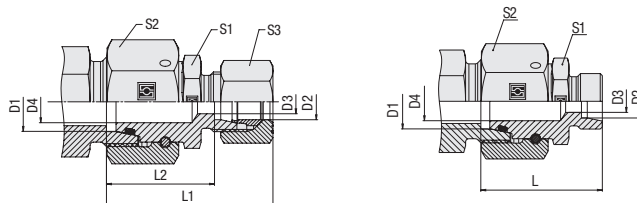

### Ordering Codes

**\*FI-RESDS\*-10/\*08\*L\*-B\*-W3\*-DKO\*-MS**

\* Straight Reducer for Tube Ends with 24° Taper / O-Ring (DKO) **FI-RESDS**

\* Outside Tube Diameter D1 (in mm) **-10**

\* Outside Tube Diameter D2 (in mm) **08**

\* Series Light Series (pages 122/123) **L**  
Heavy Series (pages 124/125) **S**

\* Seal Material NBR (Buna-N®) **-B**  
FKM (Viton®) **-V**  
EPDM **-E**

\* Material Code Steel, zinc/nickel-plated **-W3**

Please contact STAUFF for alternative materials and surface finishings.

\* Assembling / Kitting Fitting body supplied with swivel nut and O-ring **-DKO**

Fitting body supplied with cutting ring and union nut **-MS**

Fitting body supplied with soft-sealing cutting ring and union nut **-MSV**

### Connecting Parts



Cutting Ring  
Type **FI-DS**



Soft-Sealing Cutting Ring  
Type **FI-WDDS**



Support Sleeve  
Type **FI-VH**



STAUFF Form Ring  
Type **FI-AR**



Union Nut  
Type **FI-M**



37° Flared Tube Fitting Set  
Type **FI-AB**

### Spare Parts / Accessories



O-Ring  
Type **O-RING**


Series	Tube OD (mm/in)		PN (bar/psi)	Dimensions (mm/in)							Weight (kg/lbs) ca. per 100 <sup>2</sup>	Ordering Codes <sup>3</sup>	
	D1	D2		D3	D4	L	L <sup>1</sup>	L2	S1	S2			S3
L	8	6	500	4	4	30	38	23,5	12	17	14	3,01	FI-RESDS-08/06L-B-W3-DKO
	.31	.24	7250	.16	.16	1.18	1.50	.93	.47	.67	.55	6.61	
	10	6	500	4	4	32	40	25	14	19	14	3,80	FI-RESDS-10/06L-B-W3-DKO
	.39	.24	7250	.16	.16	1.26	1.57	.98	.55	.75	.55	8.36	
	10	8	500	6	6	32	40	25	14	19	17	3,99	FI-RESDS-10/08L-B-W3-DKO
	.39	.31	7250	.24	.24	1.26	1.57	.98	.55	.75	.67	8.78	
	12	6	400	4	4	32	40	25	17	22	14	5,69	FI-RESDS-12/06L-B-W3-DKO
	.47	.24	5800	.16	.16	1.26	1.57	.98	.67	.87	.55	12.52	
	12	8	400	6	6	32	40	25	17	22	17	5,53	FI-RESDS-12/08L-B-W3-DKO
	.47	.31	5800	.24	.24	1.26	1.57	.98	.67	.87	.67	12.17	
	12	10	400	8	8	33	41	26	17	22	19	5,33	FI-RESDS-12/10L-B-W3-DKO
	.47	.39	5800	.31	.31	1.30	1.61	1.02	.67	.87	.75	11.72	
	15	6	400	4	11	35	43	29	22	27	14	8,83	FI-RESDS-15/06L-B-W3-DKO
	.59	.24	5800	.16	.43	1.38	1.69	1.14	.87	1.06	.55	19.43	
	15	8	400	6	11	35	43	29	22	27	17	9,08	FI-RESDS-15/08L-B-W3-DKO
	.59	.31	5800	.24	.43	1.38	1.69	1.14	.87	1.06	.67	19.98	
	15	10	400	8	8	35	43	30	22	27	19	9,61	FI-RESDS-15/10L-B-W3-DKO
	.59	.39	5800	.31	.31	1.38	1.69	1.18	.87	1.06	.75	21.14	
	15	12	400	10	10	36	44	30	22	27	22	9,25	FI-RESDS-15/12L-B-W3-DKO
	.59	.47	5800	.39	.39	1.42	1.73	1.18	.87	1.06	.87	20.35	
	18	6	400	4	13	35	43	28	24	32	14	11,07	FI-RESDS-18/06L-B-W3-DKO
	.71	.24	5800	.16	.51	1.38	1.69	1.10	.94	1.26	.55	24.36	
	18	8	400	6	13	35	43	28	24	32	17	7,57	FI-RESDS-18/08L-B-W3-DKO
	.71	.31	5800	.24	.51	1.38	1.69	1.10	.94	1.26	.67	16.66	
	18	10	400	8	8	36	44	29	24	32	19	12,64	FI-RESDS-18/10L-B-W3-DKO
	.71	.39	5800	.31	.31	1.42	1.73	1.14	.94	1.26	.75	27.81	
	18	12	400	10	10	36	44	29	24	32	22	12,24	FI-RESDS-18/12L-B-W3-DKO
	.71	.47	5800	.39	.39	1.42	1.73	1.14	.94	1.26	.87	26.93	
18	15	400	12	12	37	45	30	24	32	27	12,27	FI-RESDS-18/15L-B-W3-DKO	
.71	.59	5800	.47	.47	1.46	1.77	1.18	.94	1.26	1.06	26.99		
22	6	250	4	17	38	47	32	27	36	14	16,34	FI-RESDS-22/06L-B-W3-DKO	
.87	.24	3625	.16	.67	1.50	1.85	1.26	1.06	1.42	.55	35.96		
22	8	250	6	17	38	47	32	27	36	17	16,27	FI-RESDS-22/08L-B-W3-DKO	
.87	.31	3625	.24	.67	1.50	1.85	1.26	1.06	1.42	.67	35.80		
22	10	250	8	17	39	48	33	27	36	19	16,33	FI-RESDS-22/10L-B-W3-DKO	
.87	.39	3625	.31	.67	1.54	1.89	1.30	1.06	1.42	.75	35.92		
22	12	250	10	17	39	48	33	27	36	22	16,30	FI-RESDS-22/12L-B-W3-DKO	
.87	.47	3625	.39	.67	1.54	1.89	1.30	1.06	1.42	.87	35.87		
22	15	250	12	12	40	49	34	27	36	27	19,01	FI-RESDS-22/15L-B-W3-DKO	
.87	.59	3625	.47	.47	1.57	1.93	1.34	1.06	1.42	1.06	41.82		
22	18	250	15	15	41	50	34	27	36	32	18,13	FI-RESDS-22/18L-B-W3-DKO	
.87	.71	3625	.59	.59	1.61	1.97	1.34	1.06	1.42	1.26	39.89		
28	6	250	4	23	40	49	34	36	41	14	22,90	FI-RESDS-28/06L-B-W3-DKO	
1.10	.24	3625	.16	.91	1.57	1.93	1.34	1.42	1.61	.55	50.37		
28	8	250	6	23	40	49	34	36	41	17	20,95	FI-RESDS-28/08L-B-W3-DKO	
1.10	.31	3625	.24	.91	1.57	1.93	1.34	1.42	1.61	.67	46.09		
28	10	250	8	23	41	50	35	36	41	19	21,74	FI-RESDS-28/10L-B-W3-DKO	
1.10	.39	3625	.31	.91	1.61	1.97	1.38	1.42	1.61	.75	47.83		
28	12	250	10	23	41	50	35	36	41	22	10,22	FI-RESDS-28/12L-B-W3-DKO	
1.10	.47	3625	.39	.91	1.61	1.97	1.38	1.42	1.61	.87	22.49		
28	15	250	12	23	42	51	36	36	41	27	18,85	FI-RESDS-28/15L-B-W3-DKO	
1.10	.59	3625	.47	.91	1.65	2.01	1.42	1.42	1.61	1.06	41.47		
28	18	250	15	23	43	52	36	36	41	32	22,50	FI-RESDS-28/18L-B-W3-DKO	
1.10	.71	3625	.59	.91	1.69	2.05	1.42	1.42	1.61	1.26	49.50		
28	22	250	19	23	45	54	38	36	41	36	22,80	FI-RESDS-28/22L-B-W3-DKO	
1.10	.87	3625	.75	.91	1.77	2.13	1.50	1.42	1.61	1.42	50.16		

<sup>1</sup> Approximate dimension in assembled condition.

<sup>2</sup> Weight excluding cutting ring and union nut.

<sup>3</sup> Standard scope of delivery: Fitting body only.

Standard seal material is NBR (Buna-N®).

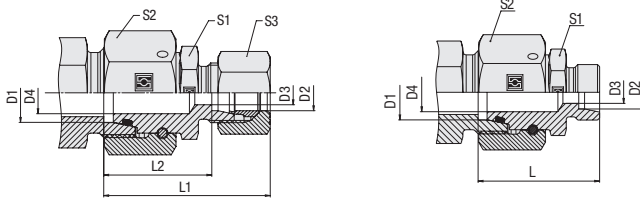**Straight Reducer for Tube Ends with 24° Taper / O-Ring  
Type FI-RESDS - Series L**


Series	Tube OD (mm/in)		PN (bar/psi)	Dimensions (mm/in)									Weight (*10/100) ca. per 100 <sup>2</sup>	Ordering Codes <sup>3</sup>
	D1	D2		D3	D4	L	L1 <sup>1</sup>	L2	S1	S2	S3			
L	35	6	250	4	28	41	52	37	46	50	14	7,82	FI-RESDS-35/06L-B-W3-DKO	
	1.38	.24	3625	.16	1.10	1.61	2.05	1.46	1.81	1.97	.55	17.20		
	35	8	250	6	28	41	52	37	46	50	17	35,43	FI-RESDS-35/08L-B-W3-DKO	
	1.38	.31	3625	.24	1.10	1.61	2.05	1.46	1.81	1.97	.67	77.95		
	35	10	250	8	28	42	53	38	46	50	19	35,35	FI-RESDS-35/10L-B-W3-DKO	
	1.38	.39	3625	.31	1.10	1.65	2.09	1.50	1.81	1.97	.75	77.77		
	35	12	250	10	28	42	53	38	46	50	22	33,34	FI-RESDS-35/12L-B-W3-DKO	
	1.38	.47	3625	.39	1.10	1.65	2.09	1.50	1.81	1.97	.87	73.34		
	35	15	250	12	28	43	54	39	46	50	27	15,22	FI-RESDS-35/15L-B-W3-DKO	
	1.38	.59	3625	.47	1.10	1.69	2.13	1.54	1.81	1.97	1.06	33.49		
	35	18	250	15	28	44	55	39	46	50	32	34,32	FI-RESDS-35/18L-B-W3-DKO	
	1.38	.71	3625	.59	1.10	1.73	2.17	1.54	1.81	1.97	1.26	75.50		
	35	22	250	19	28	46	57	41	46	50	36	34,80	FI-RESDS-35/22L-B-W3-DKO	
	1.38	.87	3625	.75	1.10	1.81	2.24	1.61	1.81	1.97	1.42	76.57		
	35	28	250	24	24	46	57	41	46	50	41	38,10	FI-RESDS-35/28L-B-W3-DKO	
	1.38	1.10	3625	.94	.94	1.81	2.24	1.61	1.81	1.97	1.61	83.82		
	42	6	250	4	35	36	48	41	50	60	14	52,66	FI-RESDS-42/06L-B-W3-DKO	
	1.65	.24	3625	.16	1.38	1.42	1.89	1.61	1.97	2.36	.55	115.85		
	42	8	250	6	35	36	48	41	50	60	17	52,58	FI-RESDS-42/08L-B-W3-DKO	
	1.65	.31	3625	.24	1.38	1.42	1.89	1.61	1.97	2.36	.67	115.67		
	42	10	250	8	35	44	56	42	50	60	19	52,58	FI-RESDS-42/10L-B-W3-DKO	
	1.65	.39	3625	.31	1.38	1.73	2.20	1.65	1.97	2.36	.75	115.68		
	42	12	250	10	35	44	56	42	50	60	22	52,60	FI-RESDS-42/12L-B-W3-DKO	
	1.65	.47	3625	.39	1.38	1.73	2.20	1.65	1.97	2.36	.87	115.72		
	42	15	250	12	35	46	58	43	50	60	27	52,30	FI-RESDS-42/15L-B-W3-DKO	
	1.65	.59	3625	.47	1.38	1.81	2.28	1.69	1.97	2.36	1.06	115.06		
	42	18	250	15	35	46	58	42	50	60	32	52,00	FI-RESDS-42/18L-B-W3-DKO	
	1.65	.71	3625	.59	1.38	1.81	2.28	1.65	1.97	2.36	1.26	114.40		
	42	22	250	19	35	48	60	44	50	60	36	50,10	FI-RESDS-42/22L-B-W3-DKO	
	1.65	.87	3625	.75	1.38	1.89	2.36	1.73	1.97	2.36	1.42	110.21		
	42	28	250	24	35	49	61	44	50	60	41	50,19	FI-RESDS-42/28L-B-W3-DKO	
	1.65	1.10	3625	.94	1.38	1.93	2.40	1.73	1.97	2.36	1.61	110.43		
	42	35	250	30	30	53	65	43	50	60	50	55,90	FI-RESDS-42/35L-B-W3-DKO	
	1.65	1.38	3625	1.18	1.18	2.09	2.56	1.69	1.97	2.36	1.97	122.98		

<sup>1</sup> Approximate dimension in assembled condition.

<sup>2</sup> Weight excluding cutting ring and union nut.

<sup>3</sup> Standard scope of delivery: Fitting body only.

Standard seal material is NBR (Buna-N®).

**Ordering Codes**
**\*FI-RESDS\*-10/\*08\*L\*-B\*-W3\*-DKO\*-MS**

- \* Straight Reducer for Tube Ends with 24° Taper / O-Ring (DKO) **FI-RESDS**
- \* Outside Tube Diameter D1 (in mm) **-10**
- \* Outside Tube Diameter D2 (in mm) **08**
- \* Series Light Series (pages 122/123) **L**  
Heavy Series (pages 124/125) **S**
- \* Seal Material NBR (Buna-N®) **-B**  
FKM (Viton®) **-V**  
EPDM **-E**
- \* Material Code Steel, zinc/nickel-plated **-W3**

Please contact STAUFF for alternative materials and surface finishings.

- \* Assembling / Kitting Fitting body supplied with swivel nut and O-ring **-DKO**  
Fitting body supplied with cutting ring and union nut **-MS**  
Fitting body supplied with soft-sealing cutting ring and union nut **-MSV**

**Connecting Parts**

- Cutting Ring Type **FI-DS**
- Soft-Sealing Cutting Ring Type **FI-WDDS**
- Support Sleeve Type **FI-VH**
- STAUFF Form Ring Type **FI-AR**
- Union Nut Type **FI-M**
- 37° Flared Tube Fitting Set Type **FI-AB**

**Spare Parts / Accessories**

- O-Ring Type **O-RING**