


**Thread Reducer  
Type FI-RED-...-R**

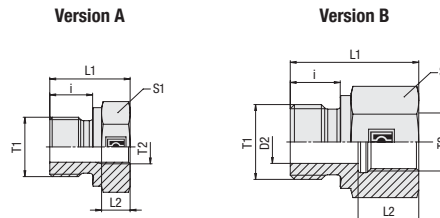

**Male / Female Whitworth Parallel Pipe Thread (BSPP)**

**Metallic Sealing Edge**

**Ordering Codes**


**\*FI-RED\*-R\*1/2\*-R\*3/8\*-B\*-W3**

- \* Thread Reducer** **FI-RED**
- \* Thread Type T1** Whitworth Parallel Pipe Thread (BSPP) **R**
- \* Thread Size T1** acc. to dimension table **1/2**  
Please always indicate thread sizes, e.g. 1/2!
- \* Thread Type T2** Whitworth Parallel Pipe Thread (BSPP) **R**
- \* Thread Size T2** acc. to dimension table **3/8**  
Please always indicate thread sizes, e.g. 3/8!
- \* Seal Material** NBR (Buna-N®) **-B**  
FKM (Viton®) **-V**  
EPDM **-E**
- \* Material Code** Steel, zinc/nickel-plated **-W3**  
Please contact STAUFF for alternative materials and surface finishings.

PN ( <sup>bar</sup> /PSI)	Dimensions ( <sup>mm</sup> / <sub>in</sub> )							Version	Weight ( <sup>kg</sup> /lbs) ca. per 100	Ordering Codes
	Thread T1	Thread T2	D2	L1	L2	i	S1			
630	G 1/8	G 1/4	4	31	17	8	19	B	4,25	FI-RED-R1/8-R1/4-W3
9135			.16	1.22	.67	.31	.75		9.35	
630	G 1/8	G 3/8	4	32	17	8	24	B	6,15	FI-RED-R1/8-R3/8-W3
9135			.16	1.26	.67	.31	.94		13.53	
400	G 1/4	G 1/8	5	28	12	12	19	B	3,91	FI-RED-R1/4-R1/8-W3
5800			.20	1.10	.47	.47	.75		8.60	
630	G 1/4	G 3/8	5	36	17	12	24	B	6,80	FI-RED-R1/4-R3/8-W3
9135			.20	1.42	.67	.47	.94		14.96	
630	G 1/4	G 1/2	5	40	20	12	30	B	11,80	FI-RED-R1/4-R1/2-W3
9135			.20	1.57	.79	.47	1.18		25.96	
630	G 1/4	G 3/4	5	43	22	12	36	B	17,50	FI-RED-R1/4-R3/4-W3
9135			.20	1.69	.87	.47	1.42		38.50	
400	G 3/8	G 1/8		22,5	8	12	22	A	4,20	FI-RED-R3/8-R1/8-W3
5800				.89	.31	.47	.87		9.24	
400	G 3/8	G 1/4	8	36	17	12	22	B	7,05	FI-RED-R3/8-R1/4-W3
5800			.31	1.42	.67	.47	.87		15.51	
400	G 3/8	G 1/2	8	41	20	12	30	B	17,80	FI-RED-R3/8-R1/2-W3
5800			.31	1.61	.79	.47	1.18		39.18	
630	G 3/8	G 3/4	8	44	22	12	36	B	18,40	FI-RED-R3/8-R3/4-W3
9135			.31	1.73	.87	.47	1.42		40.48	
400	G 1/2	G 1/8		24	8	14	27	A	6,58	FI-RED-R1/2-R1/8-W3
5800				.94	.31	.55	1.06		14.48	
400	G 1/2	G 1/4		24	12,5	14	27	A	5,53	FI-RED-R1/2-R1/4-W3
5800				.94	.49	.55	1.06		12.17	
400	G 1/2	G 3/8	12	36	17	14	27	B	9,30	FI-RED-R1/2-R3/8-W3
5800			.47	1.42	.67	.55	1.06		20.46	
400	G 1/2	G 3/4	12	46	22	14	36	B	18,50	FI-RED-R1/2-R3/4-W3
5800			.47	1.81	.87	.55	1.42		40.70	
400	G 1/2	G 1	12	49	24,5	14	41	B	22,70	FI-RED-R1/2-R1-W3
5800			.47	1.93	.96	.55	1.61		49.94	
400	G 1/2	G 1 1/4	12	53	26,5	14	55	B	48,10	FI-RED-R1/2-R1-1/4-W3
5800			.47	2.09	1.04	.55	2.17		105.82	

Male threaded studs were designed for female threaded ports in components made of steel. For applications with components made of softer mating materials (e.g. Aluminium), the use of connectors with additionally rolled male threads is recommended.

Please contact STAUFF prior to the assembly for further information.

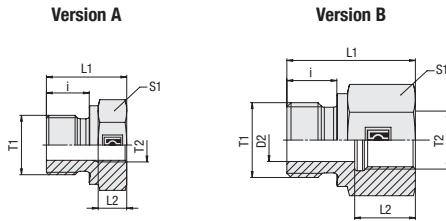

**Thread Reducer  
Type FI-RED-...-R**



**Metallic Sealing Edge**

**Male / Female Whitworth Parallel Pipe Thread (BSPP)**

PN ( <sup>bar</sup> /psi)	Dimensions ( <sup>mm</sup> / <sub>in</sub> )		D2	L1	L2	i	S1	Version	Weight ( <sup>kg</sup> /lbs) ca. per 100	Ordering Codes
	Thread T1	Thread T2								
400	G 3/4	G 1/4		26	12,5	16	32	A	10,20	FI-RED-R3/4-R1/4-W3
5800				1.02	.49	.63	1.26		22.44	
315	G 3/4	G 3/8		26	12,5	16	32	A	8,70	FI-RED-R3/4-R3/8-W3
4567,5				1.02	.49	.63	1.26		19.14	
315	G 3/4	G 1/2	16	41	20	16	32	B	14,60	FI-RED-R3/4-R1/2-W3
4567,5			.63	1.61	.79	.63	1.26		32.12	
315	G 3/4	G 1	16	51	24,5	16	41	B	24,60	FI-RED-R3/4-R1-W3
4567,5			.63	2.01	.96	.63	1.61		54.12	
400	G 3/4	G 1 1/4	16	55	26,5	16	55	B	48,40	FI-RED-R3/4-R1-1/4-W3
5800			.63	2.17	1.04	.63	2.17		106.48	
250	G 3/4	G 1 1/2	16	57	28,5	16	60	B	57,00	FI-RED-R3/4-R1-1/2-W3
3625			.63	2.24	1.12	.63	2.36		125.40	
250	G 1	G 1/4		29	12,5	18	41	A	19,10	FI-RED-R1-R1/4-W3
3625				1.14	.49	.71	1.61		42.02	
315	G 1	G 3/8		29	12,5	18	41	A	17,90	FI-RED-R1-R3/8-W3
4567,5				1.14	.49	.71	1.61		39.38	
315	G 1	G 1/2		29	14,5	18	41	A	15,40	FI-RED-R1-R1/2-W3
4567,5				1.14	.57	.71	1.61		33.88	
315	G 1	G 3/4	20	47	22	18	41	B	27,60	FI-RED-R1-R3/4-W3
4567,5			.79	1.85	.87	.71	1.61		60.72	
315	G 1	G 1 1/4	20	57	26,5	18	55	B	52,10	FI-RED-R1-R1-1/4-W3
4567,5			.79	2.24	1.04	.71	2.17		114.62	
250	G 1 1/4	G 1/2		32	14,5	20	50	A	31,30	FI-RED-R1-1/4-R1/2-W3
3625				1.26	.57	.79	1.97		68.86	
315	G 1 1/4	G 3/4		32	16,5	20	50	A	26,50	FI-RED-R1-1/4-R3/4-W3
4567,5				1.26	.65	.79	1.97		58.30	
315	G 1 1/2	G 1/2		36	14,5	22	55	A	47,30	FI-RED-R1-1/2-R1/2-W3
4567,5				1.42	.57	.87	2.17		104.06	
250	G 1 1/2	G 3/4		36	14,5	22	55	A	41,90	FI-RED-R1-1/2-R3/4-W3
3625				1.42	.57	.87	2.17		92.18	
250	G 1 1/2	G 1		36	18	22	55	A	34,10	FI-RED-R1-1/2-R1-W3
3625				1.42	.71	.87	2.17		75.02	
250	G 2	G 1 1/4		62	20,5	24	70	A	99,50	FI-RED-R2-R1-1/4-W3
3625				2.44	.81	.94	2.76		218.90	
160	G 2	G 1 1/2	40	62	28,5	28,5	70	B	107,30	FI-RED-R2-R1-1/2-W3
2320			1.57	2.44	1.12	1.12	2.76		236.06	

**Ordering Codes**

**\*FI-RED\*-R\*1/2\*-R\*3/8\*-B\*-W3**

- \* Thread Reducer FI-RED
- \* Thread Type T1 Whitworth Parallel Pipe Thread (BSPP) R
- \* Thread Size T1 acc. to dimension table 1/2
- Please always indicate thread sizes, e.g. 1/2!
- \* Thread Type T2 Whitworth Parallel Pipe Thread (BSPP) R
- \* Thread Size T2 acc. to dimension table 3/8
- Please always indicate thread sizes, e.g. 3/8!
- \* Seal Material NBR (Buna-N®) -B  
FKM (Viton®) -V  
EPDM -E
- \* Material Code Steel, zinc/nickel-plated -W3

Please contact STAUFF for alternative materials and surface finishings.

Male threaded studs were designed for female threaded ports in components made of steel. For applications with components made of softer mating materials (e.g. Aluminium), the use of connectors with additionally rolled male threads is recommended.

Please contact STAUFF prior to the assembly for further information.