


Banjo Elbow (Medium-Pressure Version) Type FI-RSWND-...-M-DK ■ Series LL / L / S

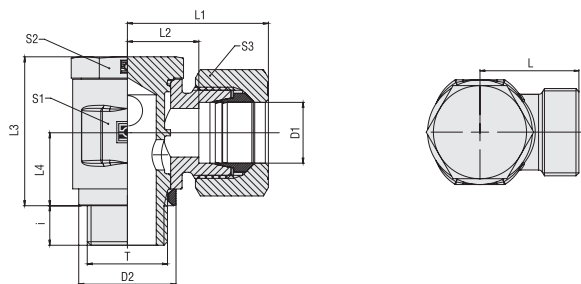

External Metallic Sealing Ring

Metric Parallel Thread

Series	Tube OD	PB	Dimensions													Weight (kg/lbs) ca. per 100 ²	Ordering Codes ³
	(mm/in)	(bar/psi)	(mm/in)	D1	D2	L	L1 ¹	L2	L3	L4	i	S1	S2	S3			
LL	4	100	M 8 x 1	10,8	15,5	21	11,5	17	8	6	14	12	10	2,66	FI-RSWND-04LLM-DK-W3		
	.16	1450		.43	.61	.83	.45	.67	.31	.24	.55	.47	.39	5,85			
	6	100	M 10 x 1	13	15,5	21	10	21	10	6	14	14	12	2,86	FI-RSWND-06LLM-DK-W3		
	.24	1450		.51	.61	.83	.39	.83	.39	.24	.55	.55	.47	6,30			
	8	100	M 10 x 1	13	16,5	23	11	21	10	6	14	14	14	2,94	FI-RSWND-08LLM-DK-W3		
	.31	1450		.51	.65	.91	.43	.83	.39	.24	.55	.55	.55	6,47			
L	6	250	M 10 x 1	13	18,5	26	11,5	21	10	6	14	14	14	3,16	FI-RSWND-06LM-DK-W3		
	.24	3625		.51	.73	1.02	.45	.83	.39	.24	.55	.55	.55	6,95			
	8	250	M 12 x 1,5	17,8	20	28	13	25	12	9	17	17	17	5,02	FI-RSWND-08LM-DK-W3		
	.31	3625		.70	.79	1.10	.51	.98	.47	.35	.67	.67	.67	11,04			
	10	250	M 14 x 1,5	17,8	22	30	15	27	13	9	19	19	19	7,02	FI-RSWND-10LM-DK-W3		
	.39	3625		.70	.87	1.18	.59	1.06	.51	.35	.75	.75	.75	15,44			
	12	160	M 16 x 1,5	21,5	23	31	16	32	15	9	22	22	22	6,63	FI-RSWND-12LM-DK-W3		
	.47	2320		.85	.91	1.22	.63	1.26	.59	.35	.87	.87	.87	14,58			
	15	160	M 18 x 1,5	23	25	33	18	37	18	9	24	24	27	13,44	FI-RSWND-15LM-DK-W3		
	.59	2320		.91	.98	1.30	.71	1.46	.71	.35	.94	.94	1.06	29,56			
	18	160	M 22 x 1,5	27	27	36	19,5	44,5	21,5	11	30	27	32	22,82	FI-RSWND-18LM-DK-W3		
	.71	2320		1.06	1.06	1.42	.77	1.75	.85	.43	1.18	1.06	1.26	50,20			
	22	160	M 26 x 1,5	31	32	41	24,5	49	24	13	36	32	36	30,46	FI-RSWND-22LM-DK-W3		
	.87	2320		1.22	1.26	1.61	.96	1.93	.94	.51	1.42	1.26	1.42	67,01			
S	6	250	M 12 x 1,5	17,8	21,5	29	14,5	25	12	9	17	17	17	5,39	FI-RSWND-06SM-DK-W3		
	.24	3625		.70	.85	1.14	.57	.98	.47	.35	.67	.67	.67	11,86			
	8	250	M 14 x 1,5	17,8	23	31	16	27	13	9	19	19	19	7,54	FI-RSWND-08SM-DK-W3		
	.31	3625		.70	.91	1.22	.63	1.06	.51	.35	.75	.75	.75	16,58			
	10	160	M 16 x 1,5	21,5	23,5	32,5	16	32	15	9	22	22	22	10,78	FI-RSWND-10SM-DK-W3		
	.39	2320		.85	.93	1.28	.63	1.26	.59	.35	.87	.87	.87	23,71			
	12	160	M 18 x 1,5	23	25	34	17,5	37	18	9	24	24	24	13,70	FI-RSWND-12SM-DK-W3		
	.47	2320		.91	.98	1.34	.69	1.46	.71	.35	.94	.94	.94	30,14			
	14	160	M 20 x 1,5	26	28,5	38,5	20,5	37	18	11	27	27	27	17,94	FI-RSWND-14SM-DK-W3		
	.55	2320		1.02	1.12	1.52	.81	1.46	.71	.43	1.06	1.06	1.06	39,47			
	16	160	M 22 x 1,5	27	30	40	21,5	44,5	21,5	11	30	27	30	23,83	FI-RSWND-16SM-DK-W3		
	.63	2320		1.06	1.18	1.57	.85	1.75	.85	.43	1.18	1.06	1.18	52,42			
	20	160	M 27 x 2	32	34	45	23,5	49	24	13	36	32	36	33,34	FI-RSWND-20SM-DK-W3		
	.79	2320		1.26	1.34	1.77	.93	1.93	.94	.51	1.42	1.26	1.42	73,35			

¹ Approximate dimension in assembled condition.

² Weight excluding cutting ring and union nut.

³ Standard scope of delivery: Fitting body only.

Port acc. to DIN 3852-1 (Form X) / ISO 9974-1

Male threaded studs were designed for female threaded ports in components made of steel. For applications with components made of softer mating materials (e.g. Aluminium), the use of connectors with additionally rolled male threads is recommended.
Please contact STAUFF prior to the assembly for further information.

Ordering Codes

***FI-RSWND*-10*L*R*-DK*-W3*-MS**

* Banjo Elbow (Medium-Pressure Version) **FI-RSWND**

* Outside Tube Diameter D1 (in mm) **-10**

* Series Extra-Light Series **LL**
Light Series **L**
Heavy Series **S**

* Thread Type Metric Parallel Thread **M**

If required, please indicate special sizes, e.g. M12x1.5!

* Seal Type External Metallic Sealing Ring **-DK**

* Material Code Steel, zinc/nickel-plated **-W3**

Please contact STAUFF for alternative materials and surface finishings.

* Assembling / Kitting Fitting body only **—**

Fitting body supplied with cutting ring and union nut **-MS**

Fitting body supplied with soft-sealing cutting ring and union nut **-MSV**

Connecting Parts



Cutting Ring
Type **FI-DS**



Soft-Sealing Cutting Ring
Type **FI-WDDS**



Support Sleeve
Type **FI-VH**



STAUFF Form Ring
Type **FI-AR**



Union Nut
Type **FI-M**



37° Flared Tube Fitting Set
Type **FI-AB**

Spare Parts / Accessories



External Metallic Sealing Ring
Type **FI-DKR**