


**Adjustable Male Stud Elbow (45°) with Lock Nut
Type FI-VEE-...-R-OK ▪ Series L / S**
Type FI-VEE-...-R-OK

Whitworth Parallel Pipe Thread (BSPP)
O-Ring and Retaining Ring (Small)

Male stud acc. to ISO 1179-3 (Type H)
Port acc. to ISO 1179-1

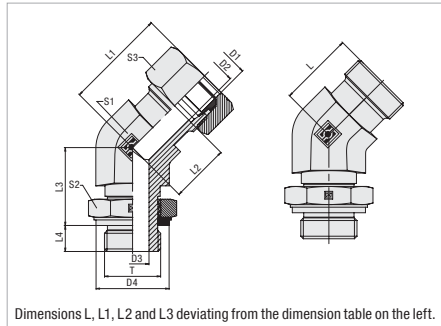

Dimensions L, L1, L2 and L3 deviating from the dimension table on the left.



Male threaded studs were designed for female threaded ports in components made of steel. For applications with components made of softer mating materials (e.g. Aluminium), the use of connectors with additionally rolled male threads is recommended.

Please contact STAUFF prior to the assembly for further information.

Connecting Parts


Cutting Ring
Type **FI-DS**



Soft-Sealing Cutting Ring
Type **FI-WDDS**



Support Sleeve
Type **FI-VH**



STAUFF Form Ring
Type **FI-AR**



Union Nut
Type **FI-M**



37° Flared Tube Fitting Set
Type **FI-AB**

Spare Parts / Accessories


O-Ring
Type **O-RING**



Retaining Ring (Small)
Type **FI-KR**