



Product Specificaties	
Max werkdruk cilinder (Bar)	350
Max snelheid cilinder (m/s)	0,5
Temperatuur afdichtingen (°C)	-25 / +80

HM0PM

## Dubbelwerkende Cilinder

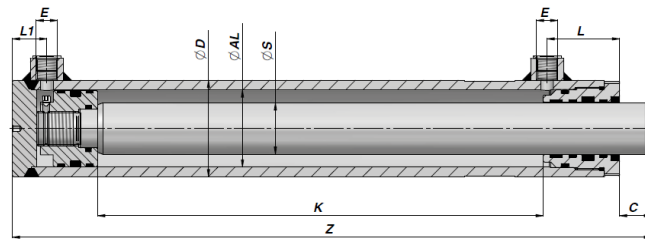

Artikelnummer	Ø D	Ø AL	Ø S	K Slag	Z	Kg	E BSP	L	L1	C
HM0PM0600400200	75	60	40	200	350	8,71	3/8"	57	30	23
HM0PM0600400400				400	550	13,12				
HM0PM0600400600				600	750	17,58				
HM0PM0600400800				800	950	22,03				
HM0PM0600401000				1000	1150	26,48				
HM0PM0700400200	85	70	40	200	375	11,21	3/8"	60	38	24
HM0PM0700400400				400	575	16,00				
HM0PM0700400600				600	775	20,81				
HM0PM0700400800				800	975	25,62				
HM0PM0700401000				1000	1175	30,43				
HM0PM0800500200	100	80	50	200	395	17,11	1/2"	67	42	28
HM0PM0800500400				400	595	24,59				
HM0PM0800500600				600	795	32,06				
HM0PM0800500800				800	995	39,53				
HM0PM0800501000				1000	1195	47,01				
HM0PM0900600200	110	90	60	200	400	21,44	1/2"	70	48	30
HM0PM0900600400				400	600	30,75				
HM0PM0900600600				600	800	40,06				
HM0PM0900600800				800	1000	49,37				
HM0PM0900601000				1000	1200	58,69				
HM0PM1000600200	120	100	60	200	405	24,33	1/2"	70	47	31
HM0PM1000600400				400	605	34,13				
HM0PM1000600600				600	805	43,93				
HM0PM1000600800				800	1005	53,73				
HM0PM1000601000				1000	1205	63,53				
HM0PM1200700200	145	120	70	200	435	38,95	1/2"	75	58	33
HM0PM1200700400				400	635	53,11				
HM0PM1200700600				600	835	67,27				
HM0PM1200700800				800	1035	81,42				
HM0PM1200701000				1000	1235	95,59				