


Product Specificaties	
Max werkdruk cilinder (Bar)	210
Max snelheid cilinder (m/s)	0,5
Temperatuur afdichtingen (°C)	-25 / +80

HTO Enkelwerkende Cilinder

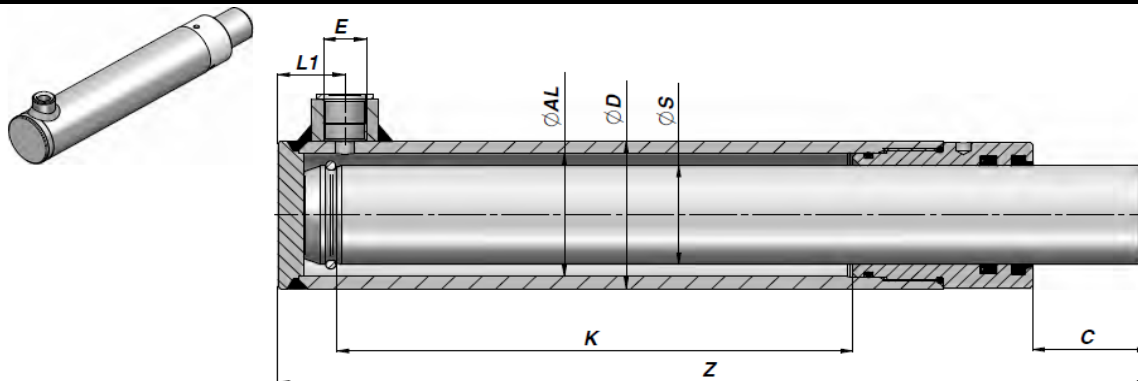

Artikelnummer	Ø D	Ø AL	Ø S	K Slag	Z	Kg	E BSP	L1	C
HT02300200	50	40	30	200	326	3,67	3/8"	23	40
HT02300250				250	376	4,22			
HT02300300				300	426	4,78			
HT02300350				350	476	5,33			
HT02300400				400	526	5,89			
HT02300500				500	626	7,00			
HT03400200	60	50	40	200	338	5,67	3/8"	26	45
HT03400300				300	438	7,34			
HT03400400				400	538	9,00			
HT03400500				500	638	10,67			
HT03400600				600	738	12,35			
HT04500300				70	60	50			
HT04500400	400	550	12,94						
HT04500500	500	650	15,28						
HT04500600	600	750	17,62						